


1324 Knee

The new standard in safety knees

This NEW knee is not the friction braking knee of old.
This geometrically aligned system never fails in stability

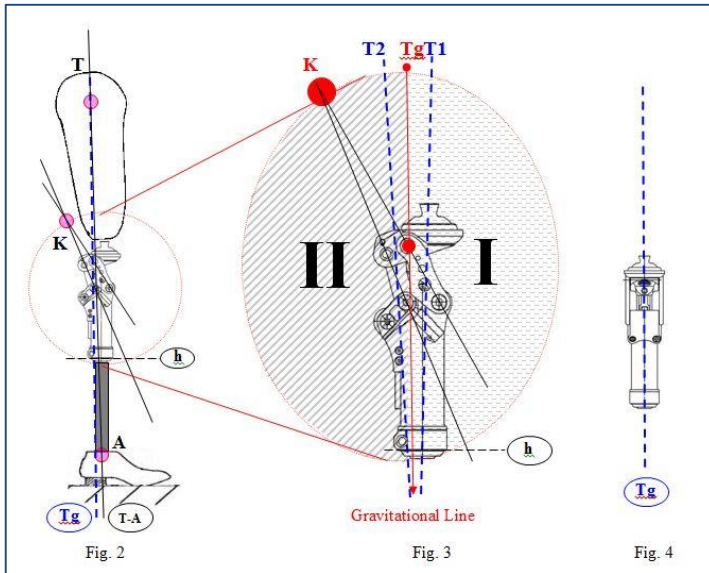

PDAC approved HCPCS code(s)
• L5611, L5845, L5850


To download PDAC Letter please visit our website at www.stngco.com

The polycentric knee with stance flexion system forces the geometry into a very stable position at heel contact until the patient rolls over the toe to release the knee into swing. The knee can be flexed in stance while providing stance stability. Elegantly simplistic design for stability. With correct alignment the knee is always in a stable position for patient confidence.

- Adjustable stance flexion from extreme stability with high stance flexion of up to 12 degrees to a very rapid response with low stance flexion
- Adjustable constant friction for swing phase resistance.
- Adjustable extension assist for swing phase.
- Usable for either above knee or knee disarticulation
- Best suited to be used for K2.
- The frame construction is made of superlight aluminum alloy and the 5-bar linkage is made of aircraft alloy. The proximal attachments has A-P slide and rotation adjustment.

Optional adapters: pyramid adapter (for AK) and lotus adapter (for KD).

P/N	1324AP Pyramid Adapter	1324AL Lotus Adapter
Weight Limit	125kg/275lbs	125kg/275lbs
Build Height	99mm	115mm
Knee Center to Top	12mm	29mm
Knee Flexion	135 Degrees	135Degrees
Product Weight	766g	766g
Material	Aluminum	Aluminum
Warranty	2 year	2 year

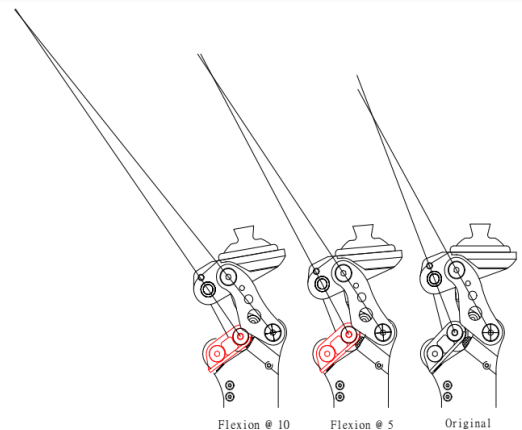

ICR (Instantaneous Center Rotation)
ICR applies to L1324, 1324 & 1323 knees



ST&G USA CORPORATION
2691 Saturn Street
Brea, CA 92821

TELEPHONE: (714) 524-0663
FAX: (714) 364-8113
E-MAIL: info@stngco.com
www.stngco.com