

LUCI Connector

Dual Cone Adapter


OTNI 17 Complete
Assembly

System height (net): 30 mm*

Mobility grade: K1-K4

Allow. body weight: 125 kg/275 lbs

Connector weight: 238 grams

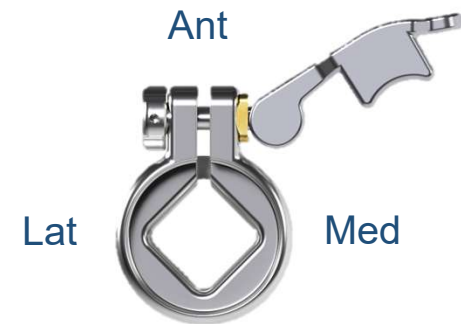

LUCI Female receiver
handle must only be on
the Anterior, Lateral, or
Medial orientation only!
Never on Posterior!

Offset plate screw torque is dependent on Body Weight and Activity Level (Refer to Table 7.2B in IFU) Never hand torque- Must be to set OTN determined values

